


球形旋钮



- 酚醛基(PF)热固性塑料旋钮，带规定公差环(KU-L型)，或者带铰螺纹孔(KU-W型)。
- 耐溶剂、机油、油脂以及其他化学溶剂
- 黑色标准色，光亮饰面。

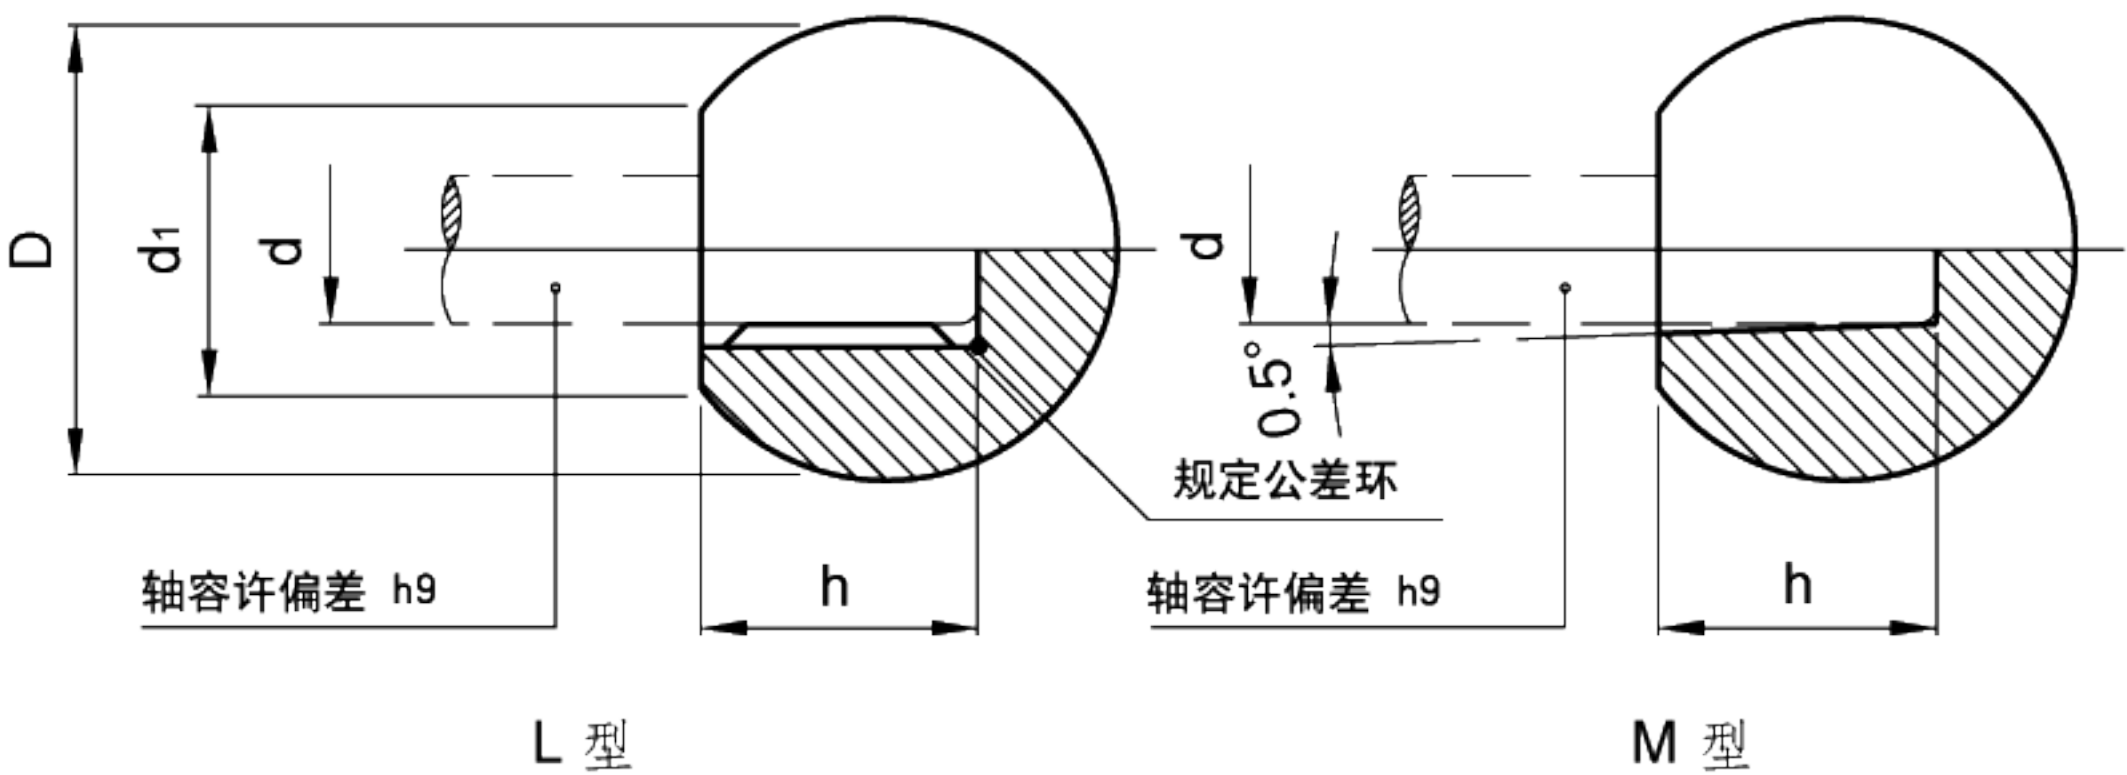

标准件	主尺寸		安装孔		重量
型号	D	d1	d	h	g
DIN 319-KU-16-B4-L	16	8	4	11	4
DIN 319-KU-16-B4-M			4	9	3
DIN 319-KU-16-B6-M			6	9	3
DIN 319-KU-20-B5-L	20	12	5	13	6
DIN 319-KU-20-B5-M			5	12	6
DIN 319-KU-25-B6-L	25	15	6	16	10
DIN 319-KU-25-B6-M			6	15	10
DIN 319-KU-25-B8-L			8	15	10
DIN 319-KU-25-B8-M			8	15	10
DIN 319-KU-25-B10-L			10	15	11
DIN 319-KU-32-B8-L	32	18	8	15	23
DIN 319-KU-32-B8-M			8	15	23
DIN 319-KU-32-B10-L			10	20	23
DIN 319-KU-32-B10-M			10	15	20
DIN 319-KU-32-B12-L			12	20	21
DIN 319-KU-40-B10-L	40	22	10	20	44
DIN 319-KU-40-B10-M			10	20	42
DIN 319-KU-40-B12-L			12	23	42
DIN 319-KU-40-B12-M			12	20	41
DIN 319-KU-40-B16-L			16	23	38
DIN 319-KU-50-B12-L	50	28	12	20	86
DIN 319-KU-50-B12-M			12	22	86
DIN 319-KU-50-B16-L			16	23	83
DIN 319-KU-50-B16-M			16	22	81
DIN 319-KU-50-B20-L			20	28	78