


DIN 6335

凸轮式旋钮

- 球墨和磨光铸铁凸轮式旋钮。
- 轮毂：
 - H7规定公差普通盲孔(C型)
 - 带螺纹通孔(D型)
 - 带螺纹盲孔(E型)

如订货数量充足，可根据用户要求提供
— 带轮毂凸轮式旋钮，不带孔(A型)

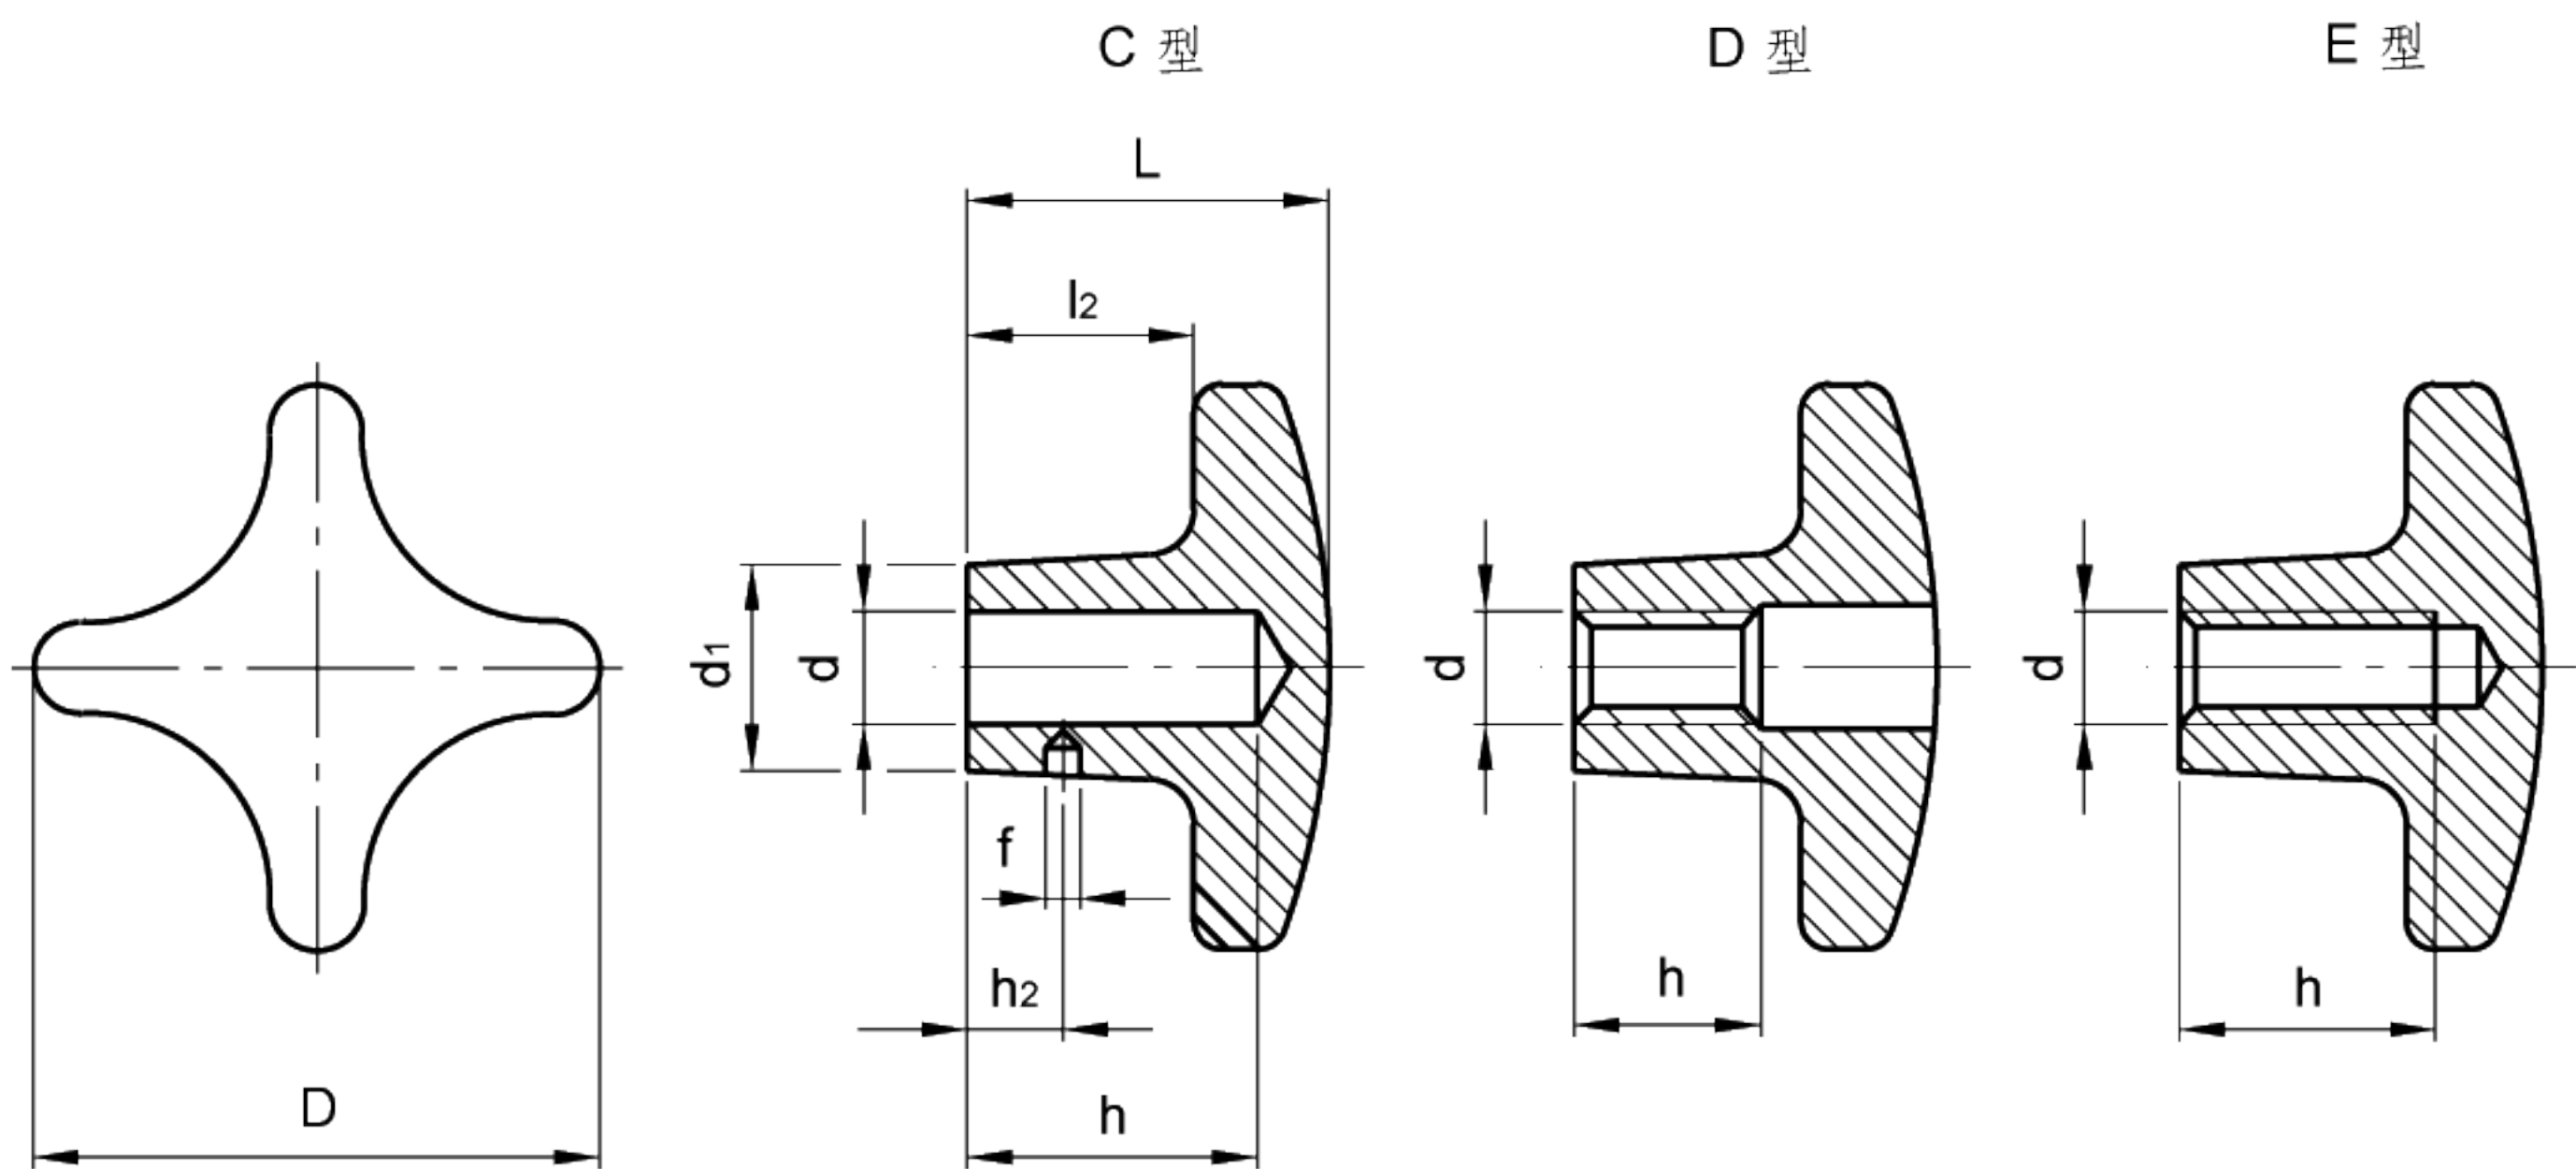

标准件	主尺寸						安装孔			重量
型号	D	L	d1	l2	h2	f	d H7	d 6H	h	g
DIN 6335-GG-32-B6-C	32	20	12	10	6	2.3	6	-	12	29
DIN 6335-GG-32-M6-D					-	-	-	M6	10	28
DIN 6335-GG-32-M6-E					-	-	-	M6	12	30
DIN 6335-GG-40-B8-C	40	25	14	14	7	2.8	8	-	15	49
DIN 6335-GG-40-M8-D					-	-	-	M8	13	47
DIN 6335-GG-40-M8-E					-	-	-	M8	15	49
DIN 6335-GG-50-B10-C	50	32	18	20	8	2.8	10	-	18	103
DIN 6335-GG-50-M10-D					-	-	-	M10	16	101
DIN 6335-GG-50-M10-E					-	-	-	M10	18	105
DIN 6335-GG-63-B12-C	63	40	20	25	10	3.8	12	-	22	169
DIN 6335-GG-63-M12-D					-	-	-	M12	20	159
DIN 6335-GG-63-M12-E					-	-	-	M12	22	170
DIN 6335-GG-80-B16-C	80	50	25	30	12	3.8	16	-	28	368
DIN 6335-GG-80-M16-D					-	-	-	M16	20	329
DIN 6335-GG-80-M16-E					-	-	-	M16	28	350
DIN 6335-GG-100-B20-C	100	63	32	38	14	4.8	20	-	36	682
DIN 6335-GG-100-M20-D					-	-	-	M20	25	640
DIN 6335-GG-100-M20-E					-	-	-	M20	36	715