
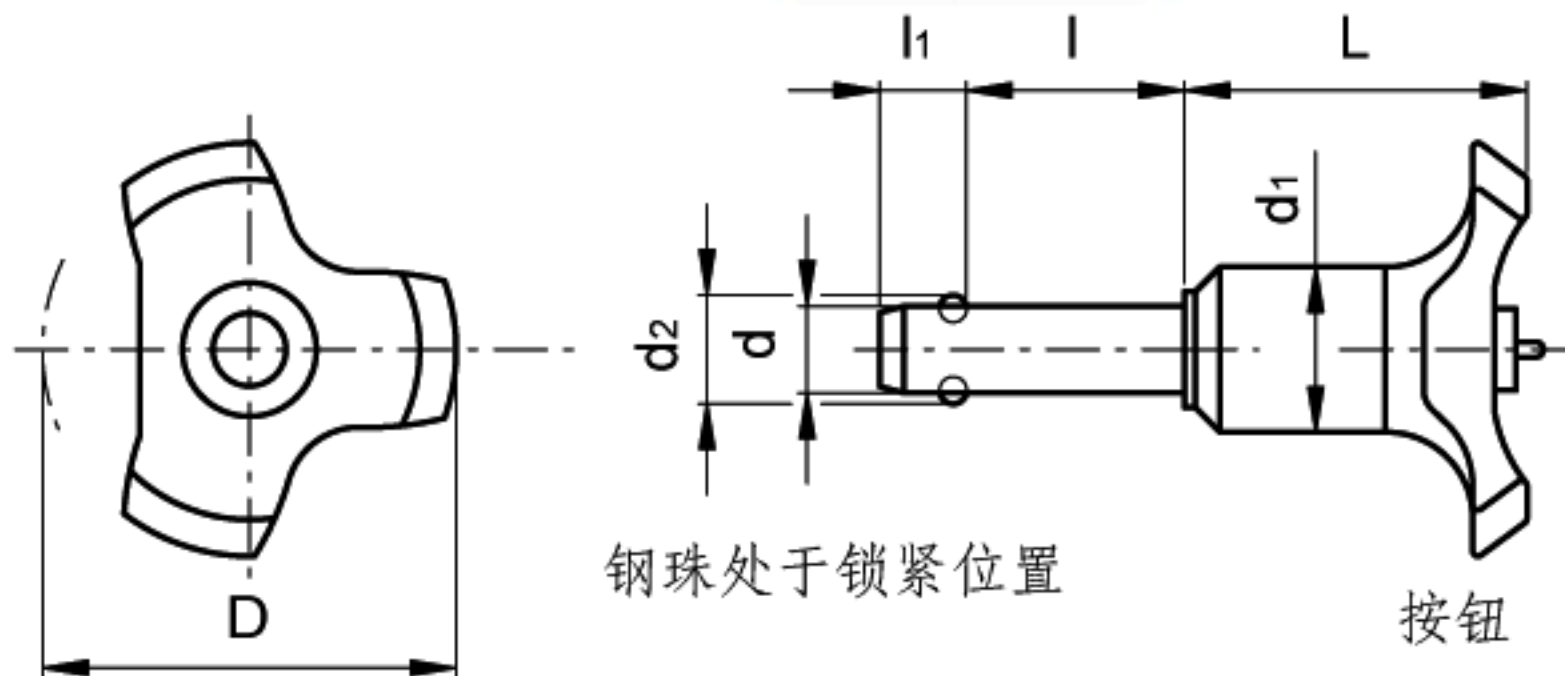
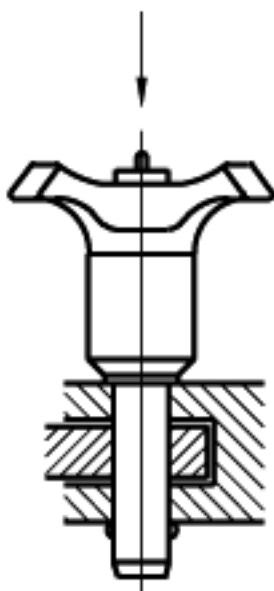


钢珠锁销

- AISI303不锈钢本体。
- 黑色三手柄臂玻璃纤维加固聚酰胺基(PA)高科技聚合体材料手柄。
- 橙色高科技聚合体材料，带亚光筒形本体。
- 耐溶剂、机油、油脂以及其他化学溶剂。
- 不锈钢钢珠和弹簧。
- 工作温度-30℃到+80℃。

钢珠锁销带镀镍钢质环，用于防止锁销丢失，或者不使用时隔放位置。钢珠锁销GN113，专门用于待加工工件的快速固定，或者连接的场合。按动弹簧承载按钮，两个钢珠松开，松开按钮，钢珠锁紧。

AISI303不锈钢特别强的耐腐蚀性，使得这些操作件特别适用于食品加工、化工和制药工业的机器设备。

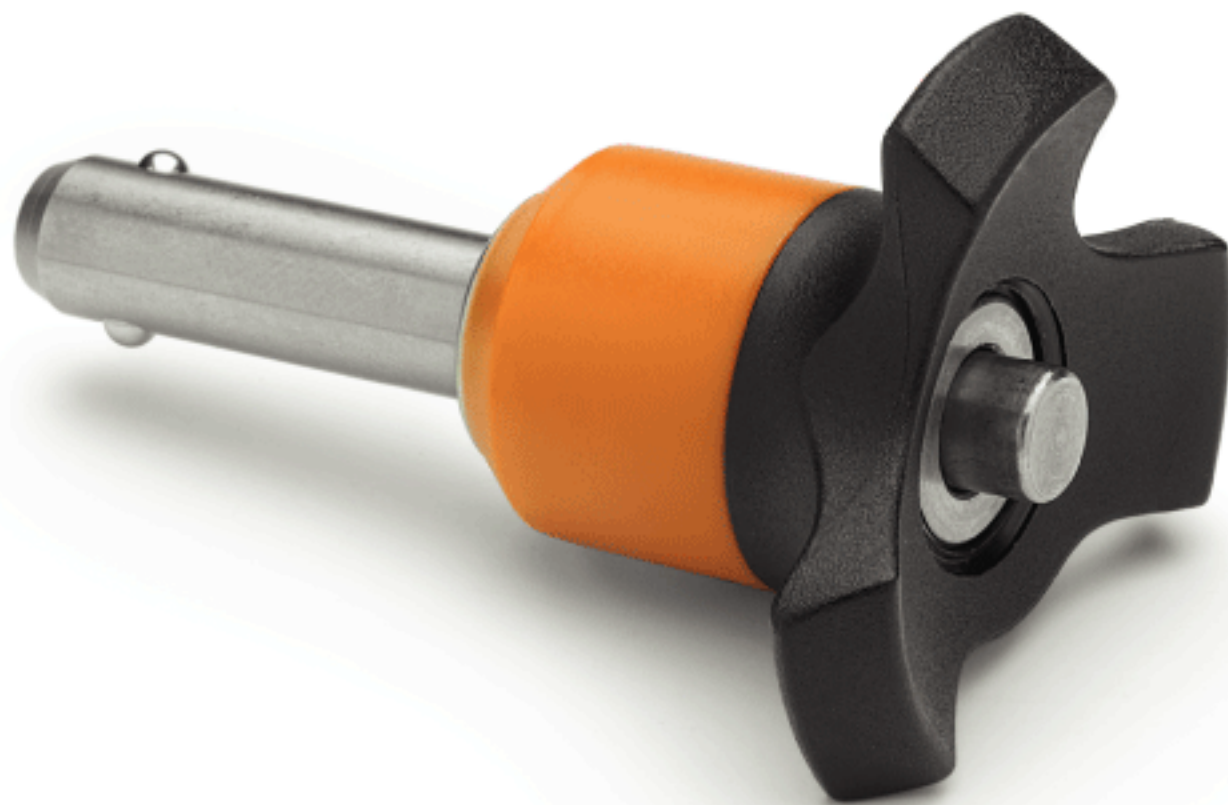

标准件	主尺寸							安装孔	双剪力 [KN]	重量
型号	d -0.04/-0.08	d1	d2	D	l	l1	L	H11		g
GN 113-5-10	5	16	5.5	38	10	6	31.5	5	24	28
GN 113-5-15					15					29
GN 113-5-20					20					29
GN 113-5-25					25					30
GN 113-5-30					30					31
GN 113-6-10	6	16	7	38	10	7	31.5	6	35	29
GN 113-6-15					15					30
GN 113-6-20					20					31
GN 113-6-25					25					32
GN 113-6-30					30					33
GN 113-6-35					35					34
GN 113-6-40					40					35
GN 113-6-45					45					36
GN 113-6-50					50					37
GN 113-8-20	8	16	9.5	38	20	8	31.5	8	63	35
GN 113-8-25					25					37
GN 113-8-30					30					38
GN 113-8-35					35					40
GN 113-8-40					40					42
GN 113-8-45					45					44
GN 113-8-50					50					46
GN 113-10-20	10	23	12	43	20	9	36	10	100	72
GN 113-10-25					25					75
GN 113-10-30					30					78
GN 113-10-35					35					81
GN 113-10-40					40					84
GN 113-10-45					45					87
GN 113-10-50					50					90
GN 113-10-60					60					96
GN 113-12-25	12	23	14.5	43	25	10	36	12	144	86
GN 113-12-30					30					90
GN 113-12-35					35					94
GN 113-12-40					40					98
GN 113-12-45					45					103
GN 113-12-50					50					107
GN 113-12-60					60					115
GN 113-12-70					70					124
GN 113-12-80					80					133
GN 113-16-30	16	26	19	50	30	13.5	45	16	257	158
GN 113-16-35					35					164
GN 113-16-40					40					170
GN 113-16-45					45					176
GN 113-16-50					50					182
GN 113-16-60					60					193
GN 113-16-70					70					205
GN 113-16-80					80					216